



* KCMMB4K CONCRETE SHALL BE USED THROUGHOUT AND ADHERE TO CITY OF GARDNER TECHNICAL SPECIFICATIONS.

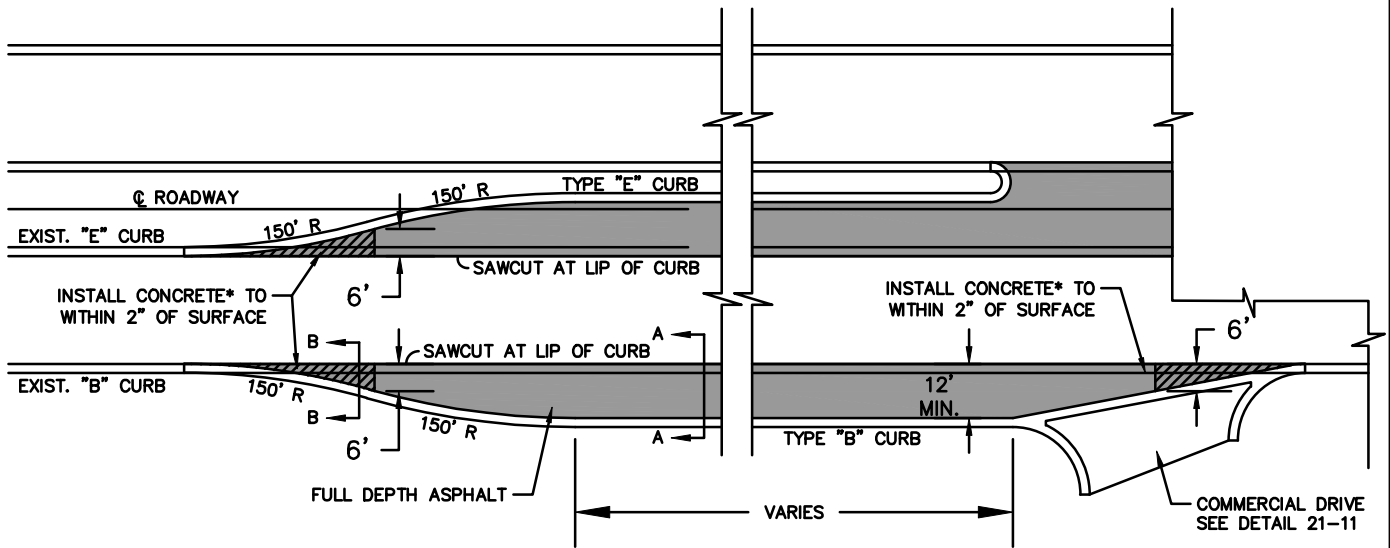


TYPICAL LANE WIDENING
N.T.S.

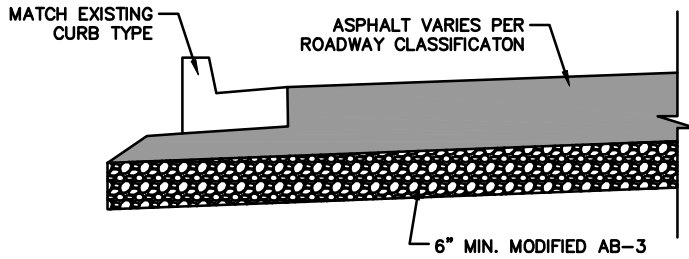

SECTION A-A
N.T.S.

NOTE: CONTRACTOR SHALL MATCH EXISTING CROSS SLOPE TO THE GREATEST EXTENT PRACTICAL. THE FORMS SHALL BE APPROVED BY THE CITY ENGINEER PRIOR TO PLACEMENT OF CONCRETE.

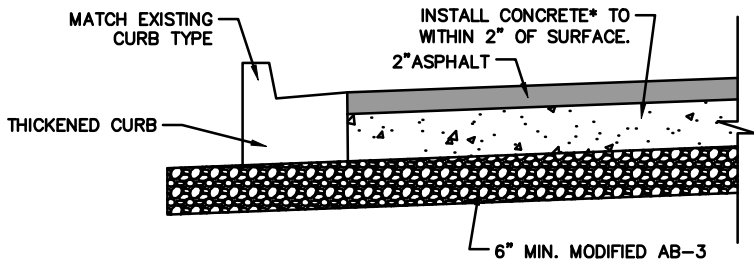

SECTION B-B
N.T.S.

NOTE: WHEN CONCRETE IS USED IN BASE WIDENING, CONCRETE CURB SHALL BE POURED THICKENED, WITH FACE OF CURB MATCHING THICKNESS OF PAVEMENT SECTION. EXTRA THICKNESS OF CURB SHALL BE SUBSIDIARY.



APPROVED

TRM
CITY ENGINEER

5-25-22
DATE

REVISED

TYPICAL LANE WIDENING

STANDARD
DETAIL

13-6