

SPECIFICATIONS

- * NEMA 3R CONSTRUCTION
- * FABRICATED FROM .125 THK NATURAL ALUMINIUM
- * FACTORY WIRING 600 VOLT RATED COPPER
- * ALL EXTERIOR HINGES CONTINUOUS FRANGO TYPE
- * ALL COMPONENTS ARE U.L. LISTED.

PAGE 1 OF 2

THIS INFORMATION IS PROPERTY OF PACIFIC UTILITIES AND ENERGY SERVICES. IT IS TO BE USED ONLY FOR THE PROJECT AND UNDER THE EXCLUSIVE CONTROL OF PACIFIC UTILITIES PRODUCTS, INC. WITHOUT A CONFIDENTIALITY AGREEMENT.


COMPONENT DIRECTORY

NO.	DESCRIPTION
1	120/240VAC 1-PHASE 3-WIRE
2	LANDING LEADS 300CMIL-4 PER PH
3	MTR SOCKET 288A 45 W/3A CLIP
4	MTR CB 16A 2P 120/240VAC 1PH/1C
5	LOAD CENTER 153A FROCT 1-PHASE
6	CB 30A 2P 120/240VAC 1PH/1C
7	CB 15A 1P 120/240VAC 1PH/1C
8	EMERGENCY RELAY 30A 30P4
9	TERMINAL BLOCK 2P 30A 3P 30A 4W
10	SWITCH TOGGLE 58Y 20A
11	FR RECEPTACLE
12	INSULATED NEUTRAL BUS
13	GROUND BUS
14	CORREN / FELCO TYPE 2 LOCK


SERVICE PIEDestal	
S.O. No.	QTY.
DATE	9 SEPTEMBER, 2011
DESIGNER	FOR PEEL COMPANY SALES

USP NON-RESIDENTIAL SERVICE PIEDestal
0 - 200 AMPERES
0 - 600 VOLTS


PACIFIC UTILITY PRODUCTS
2430 BALFOUR ST.
CORONA, CALIFORNIA 92880

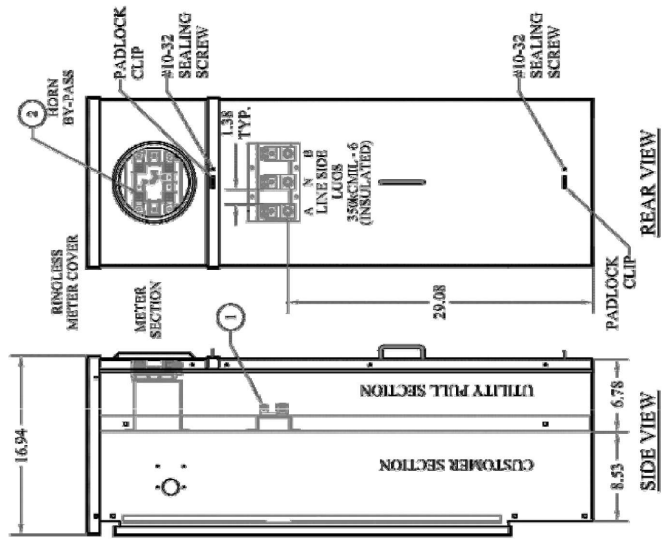

STANDARD PIEDestal OF
CITY OF GARDNER
4-CIRCUIT POWER SUPPLY

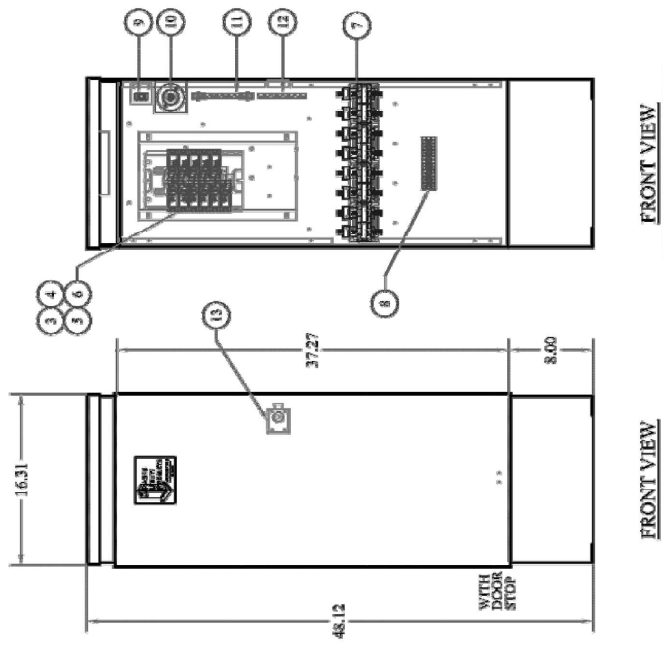

FRONT VIEW
SHOWN LESS DOOR & COVERS



PLAN VIEW

STANDARD
DETAIL
90-1

**STREET
LIGHT
CONTROLLER**

REVISED
11/4/22

APPROVED
TRM
CITY ENGINEER
2-1-07
DATE

GARDNER, KANSAS
PUBLIC
WORKS/
ENGINEERING
DIVISION

